
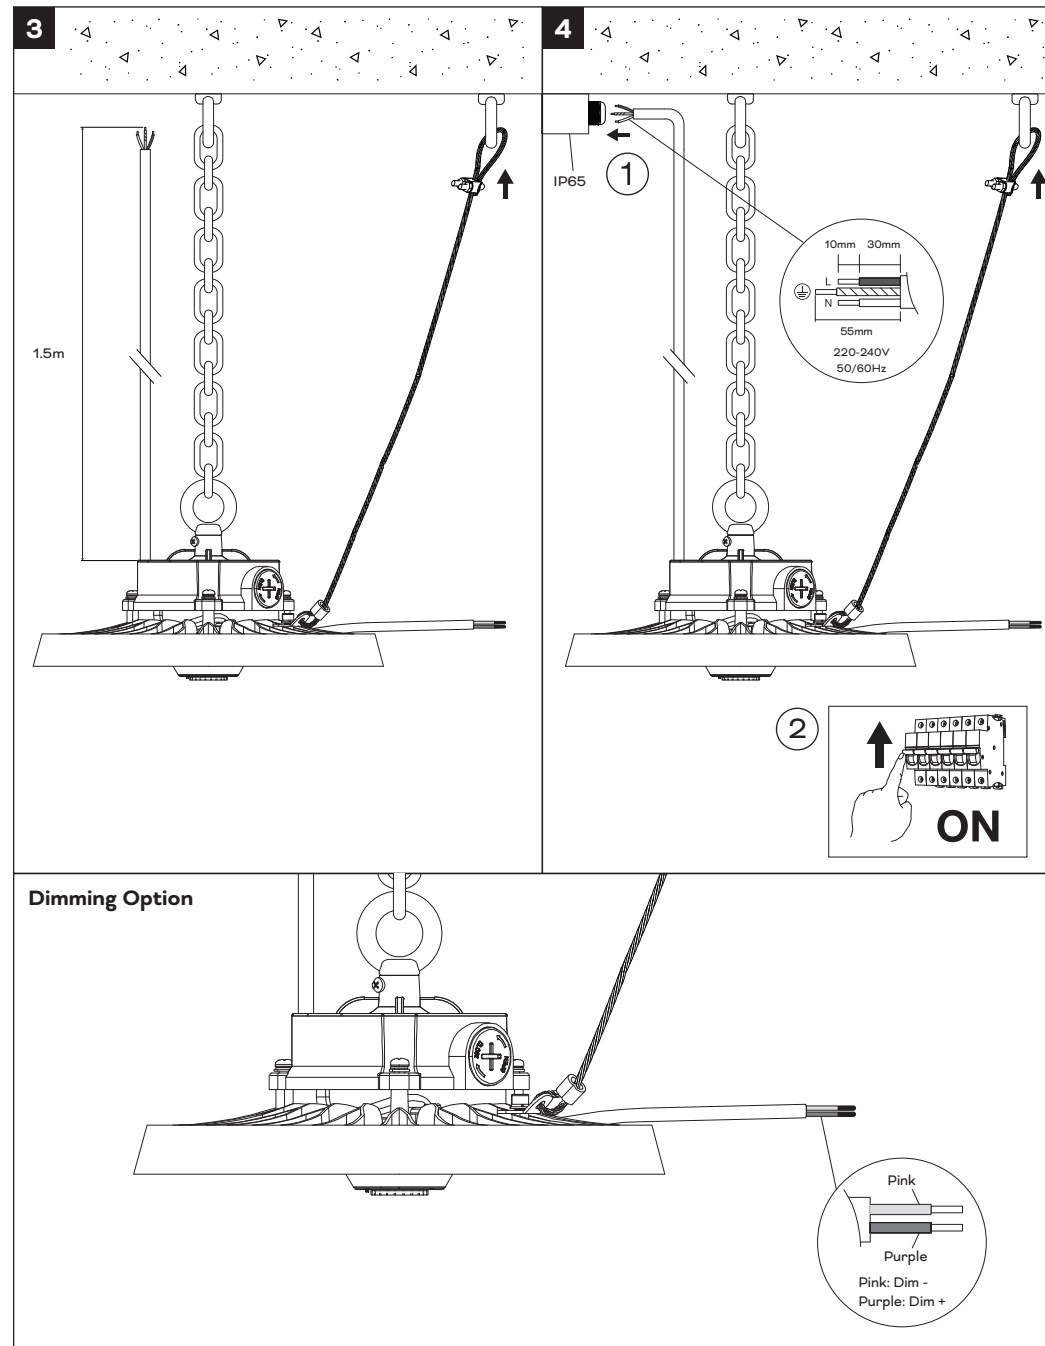



Model	Fixture Lumen / Light source Lumen	Ra	CCT	LxWxH(mm)	Weight	Item code		Energy Class of Light source
LP HB MINI 94W 840/850/865 60 DIM	15000lm / 15500lm	80	4000K/5000K/6500K	Ø231x147	1550g	TXGL26100141655		C
LP HB MINI 94W 840/850/865 90 DIM	15000lm / 15500lm	80	4000K/5000K/6500K	Ø231x147	1550g	TXGL26100141755		C
LP HB MINI 94W 840/850/865 120 DIM	15000lm / 15500lm	80	4000K/5000K/6500K	Ø231x147	1550g	TXGL26100141855		C
LP HB MIDI 150W 840/850/865 60 DIM	22500lm / 23500lm	80	4000K/5000K/6500K	Ø261x147	1890g	TXGL26100141955		D
LP HB MIDI 150W 840/850/865 90 DIM	22500lm / 23500lm	80	4000K/5000K/6500K	Ø261x147	1890g	TXGL26100142055		D
LP HB MIDI 150W 840/850/865 120 DIM	22500lm / 23500lm	80	4000K/5000K/6500K	Ø261x147	1890g	TXGL26100142155		D
LP HB MAXI 200W 840/850/865 60 DIM	30000lm / 31000lm	80	4000K/5000K/6500K	Ø297x154	2255g	TXGL26100142255		D
LP HB MAXI 200W 840/850/865 90 DIM	30000lm / 31000lm	80	4000K/5000K/6500K	Ø297x154	2255g	TXGL26100142355		D
LP HB MAXI 200W 840/850/865 120 DIM	30000lm / 31000lm	80	4000K/5000K/6500K	Ø297x154	2255g	TXGL26100142455		D

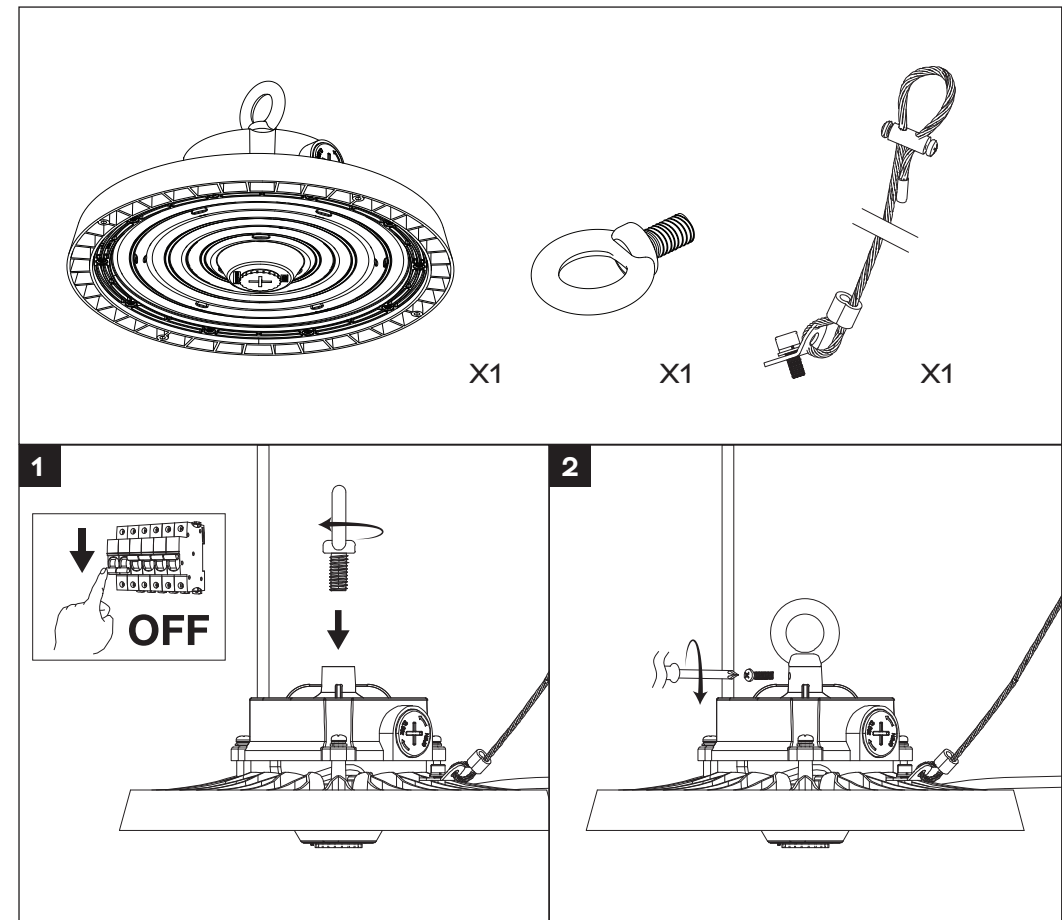

Max no. of Luminaires on circuit breakers

			
Herbert 3CCT 94W	18	12	18
Herbert 3CCT 150W	19	12	19
Herbert 3CCT200W	14	9	14

Power & 3CCT Switching

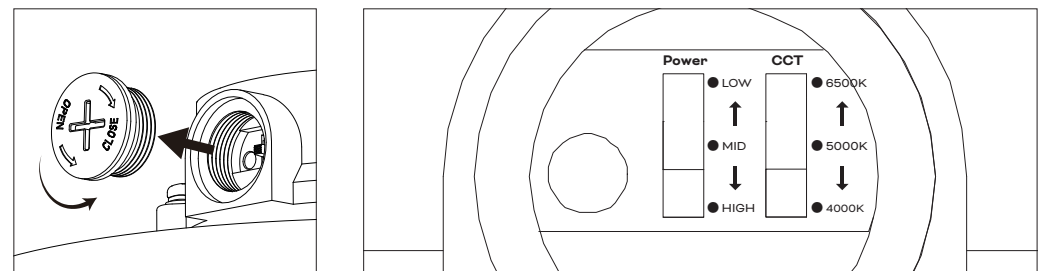

High (Default)

Wattage		94W	150W	200W
Lumen@CCT	4000K	15000lm	22500lm	30000lm
	5000K	15000lm	22500lm	30000lm
	6500K	15000lm	22500lm	30000lm
Lumen Efficacy	4000K	160lm/W	150lm/W	150lm/W
	5000K	160lm/W	150lm/W	150lm/W
	6500K	160lm/W	150lm/W	150lm/W

MID

Wattage		85W	120W	160W
Lumen@CCT	4000K	13600lm	18600lm	24800lm
	5000K	13600lm	18600lm	24800lm
	6500K	13600lm	18600lm	24800lm
Lumen Efficacy	4000K	160lm/W	155lm/W	155lm/W
	5000K	160lm/W	155lm/W	155lm/W
	6500K	160lm/W	155lm/W	155lm/W

LOW

Wattage		70W	90W	120W
Lumen@CCT	4000K	11500lm	14400lm	19200lm
	5000K	11500lm	14400lm	19200lm
	6500K	11500lm	14400lm	19200lm
Lumen Efficacy	4000K	165lm/W	160lm/W	160lm/W
	5000K	165lm/W	160lm/W	160lm/W
	6500K	165lm/W	160lm/W	160lm/W



